


# 90 DEGREE/CORNER JOINERS

## TABLE OF CONTENTS

|                        |   |
|------------------------|---|
| 180 Degree Joiner 14mm | 2 |
| 180 Degree Joiner 21mm | 3 |
| 180 Degree Joiner 23mm | 4 |
| 180 Degree Joiner 26mm | 5 |
| 180 Degree Joiner 35mm | 6 |

## PRODUCT SPECIFICATIONS

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Product</b>           | 180 Degree Joiner 14mm                                        |
| <b>Code</b>              | J14-S-180, J14-M-180,<br>J14-G-180, J14-BN-180,<br>J14-GM-180 |
| <b>Colours Available</b> | Silver, Midnight, Gold,<br>Brushed Nickel, Gunmetal           |
| <b>Material</b>          | Anodised Aluminium                                            |
| <b>Applications</b>      | Indoor and Outdoor                                            |
| <b>Features</b>          | Suitable for all NeXT<br>Generation 14                        |

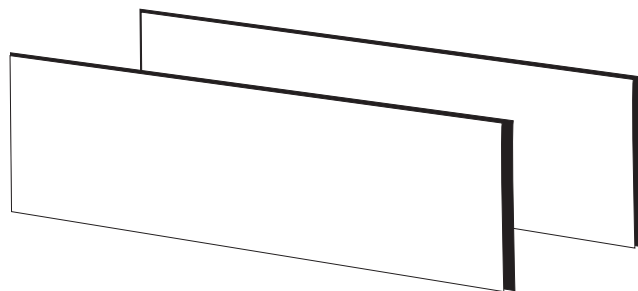

\* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


\* Neutral cure silicone is recommended

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

## PRODUCT SPECIFICATIONS

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Product</b>           | 180 Degree Joiner 21mm                                        |
| <b>Code</b>              | J21-S-180, J21-M-180,<br>J21-G-180, J21-BN-180,<br>J21-GM-180 |
| <b>Colours Available</b> | Silver, Midnight, Gold,<br>Brushed Nickel, Gunmetal           |
| <b>Material</b>          | Anodised Aluminium                                            |
| <b>Applications</b>      | Indoor and Outdoor                                            |
| <b>Features</b>          | Suitable for all NeXT<br>Generation 21 and Tile<br>Insert 21  |

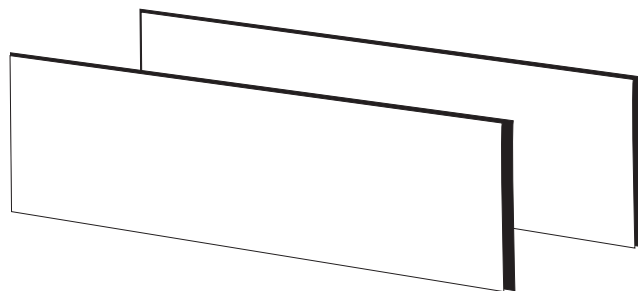

\* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


\* Neutral cure silicone is recommended

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

## PRODUCT SPECIFICATIONS

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Product</b>           | 180 Degree Joiner 23mm                                        |
| <b>Code</b>              | J23-S-180, J23-M-180,<br>J23-G-180, J23-BN-180,<br>J23-GM-180 |
| <b>Colours Available</b> | Silver, Midnight, Gold,<br>Brushed Nickel, Gunmetal           |
| <b>Material</b>          | Anodised Aluminium                                            |
| <b>Applications</b>      | Indoor and Outdoor                                            |
| <b>Features</b>          | Suitable for all Standard<br>Floor Grate                      |

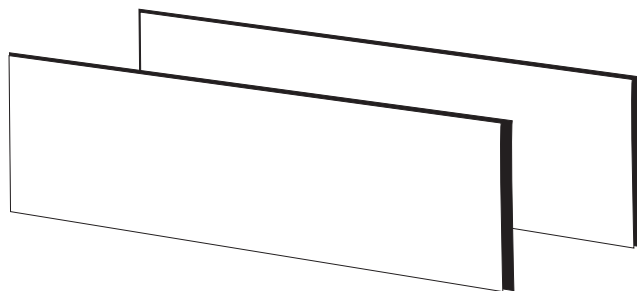

\* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


\* Neutral cure silicone is recommended

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

## PRODUCT SPECIFICATIONS

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Product</b>           | 180 Degree Joiner 26mm                                        |
| <b>Code</b>              | J26-S-180, J26-M-180,<br>J26-G-180, J26-BN-180,<br>J26-GM-180 |
| <b>Colours Available</b> | Silver, Midnight, Gold,<br>Brushed Nickel, Gunmetal           |
| <b>Material</b>          | Anodised Aluminium                                            |
| <b>Applications</b>      | Indoor and Outdoor                                            |
| <b>Features</b>          | Suitable for all NeXT<br>Generation 26 and Tile<br>Insert 26  |

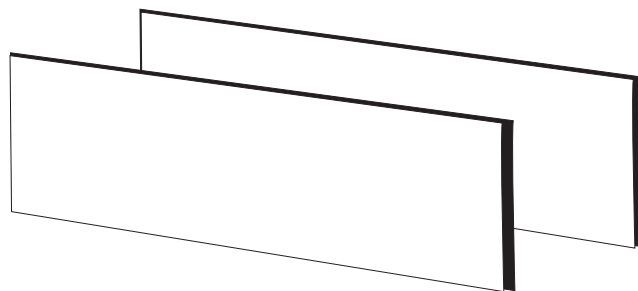

\* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


\* Neutral cure silicone is recommended

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

## PRODUCT SPECIFICATIONS

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>Product</b>           | 180 Degree Joiner 35mm                                        |
| <b>Code</b>              | J35-S-180, J35-M-180,<br>J35-G-180, J35-BN-180,<br>J35-GM-180 |
| <b>Colours Available</b> | Silver, Midnight, Gold,<br>Brushed Nickel, Gunmetal           |
| <b>Material</b>          | Anodised Aluminium                                            |
| <b>Applications</b>      | Indoor and Outdoor                                            |
| <b>Features</b>          | Suitable for all NeXT<br>Generation 35 & Tile<br>Insert Plus  |

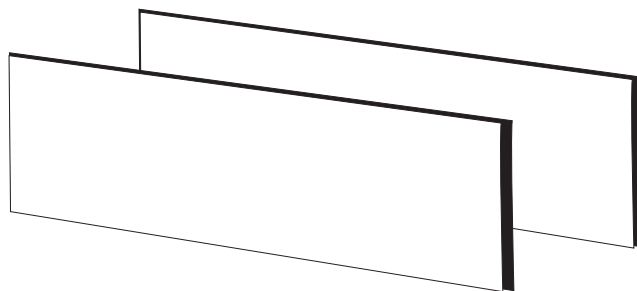

\* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.

\* Neutral cure silicone is recommended

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.