


## PRODUCT SPECIFICATIONS

<b>Product</b>	Storm Water Grate (SW128)
<b>Code</b>	SW128-S-3, SW128-M-3
<b>Colour</b>	Silver, Midnight
<b>Length</b>	3000mm
<b>Width</b>	128mm
<b>Depth</b>	19mm (Top Only)
<b>Material</b>	Anodised Aluminium
<b>Weight</b>	4.0kg
<b>Applications</b>	Outdoor
<b>Features</b>	<ul style="list-style-type: none"> <li>• Sleek Design</li> <li>• Easy Installation</li> <li>• High Water Flow</li> <li>• Lifetime Rustproof Warranty</li> <li>• UV Stable</li> <li>• Replacement Top Only</li> </ul>
<b>Load Rating</b>	Class B - Maximum Load at 10.2 tons

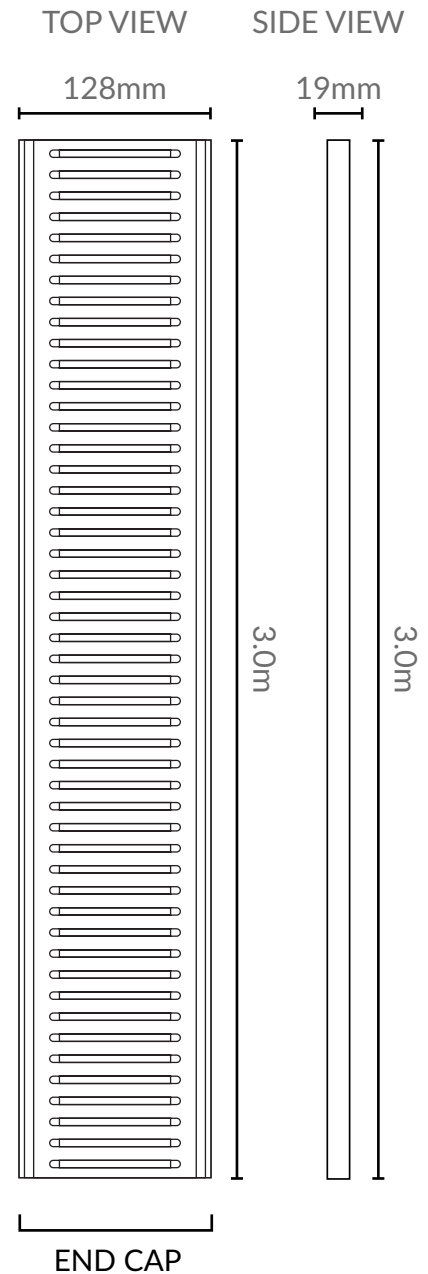

- \* Total length of full grate is 3.2m, total usable length is 3.0m to allow for any wastage during the anodising process.
- \* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com.au](http://www.lauxesgrates.com.au)

# CUTTING INSTRUCTIONS AND INSTALLATION

For ease of cutting Lauxes grates, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more.

1. Cut your Lauxes grate to the desired length.
2. Remove existing plastic top tray.
3. Replace with new Lauxes Storm Water top tray.

\* During installation ensure the grate does not come in contact with any wet cement based products.

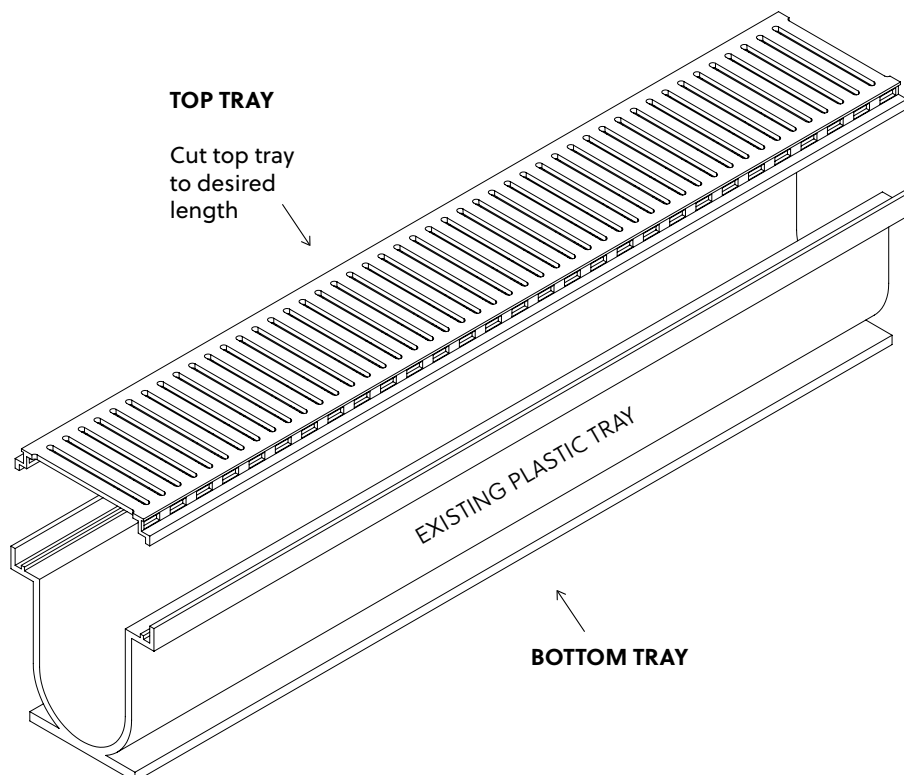

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.