


128 STORMWATER TILE INSERT (SWT128)




Code SWT128-S-3, SW128-M-3

Colours Available Midnight

PRODUCT SPECIFICATIONS

Length	3000mm
Width	128mm
Depth	19mm (Top Only)
Material	Anodised Aluminium
Weight	7.2kg

Applications	Outdoor
Features	• Sleek Design • Easy Installation • High Water Flow • Suitable for tiles up to 13mm thick • Lifetime Rustproof Warranty • UV Stable • Replacement Top Only
Load Rating	Class B – Maximum Load at 10.2 tons

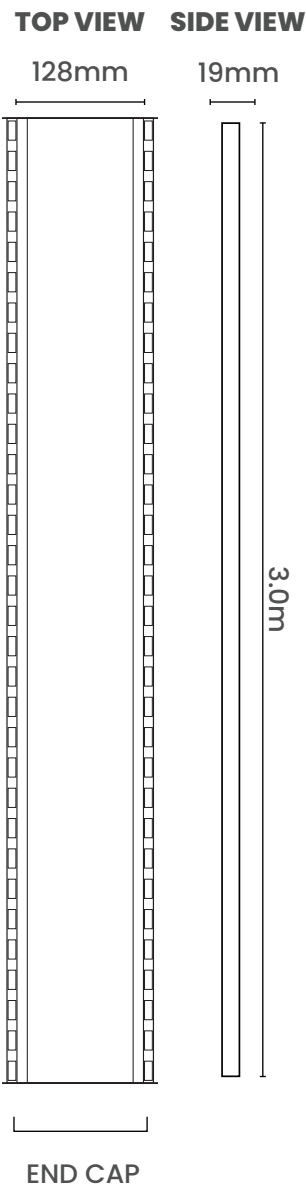

* Total length of full grate is 3.2m, total usable length is 3.0m to allow for any wastage during the anodising process.

* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.

Warranty & Care Information

www.lauxesgrates.com.au




1300 214 510



Cutting Instructions & Installation

For ease of cutting Lauxes grates, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more.

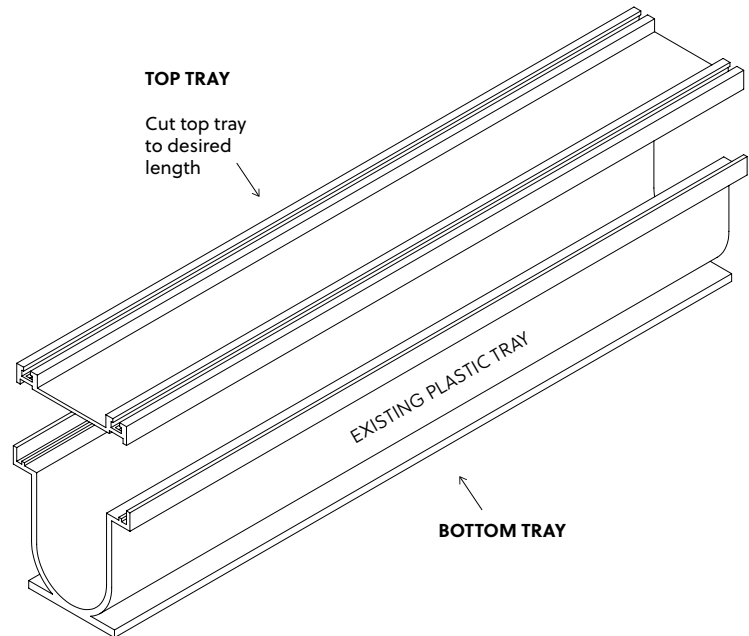

* During installation ensure the grate does not come in contact with any wet cement based products.

* When installing tile, use a neutral cure silicone.

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.

Disclaimer: All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

Warranty & Care Information

www.lauxesgrates.com.au

1

Cut your Lauxes grate to the desired length.

2

Remove existing plastic top tray.

3

Replace with new Lauxes Storm Water top tray.